


# Access-Ability, supplier of accessibility ...

## Ax-S Ramp

Ax-S ramp is unique on the market by its quality of construction (without welding), its durability and aesthetics.

The ramp is made of aluminum extrusion profiles clamped together, screwed or riveted in order to obtain a perfectly compact product without welding. This assembly without welding eliminates problems generated by rupture or corrosion of the welds.

The materials which make up this ramp are of the first quality and all fasteners are made of stainless steel. Each of its pieces has been thoroughly studied in order to obtain a product of evident quality at first sight.

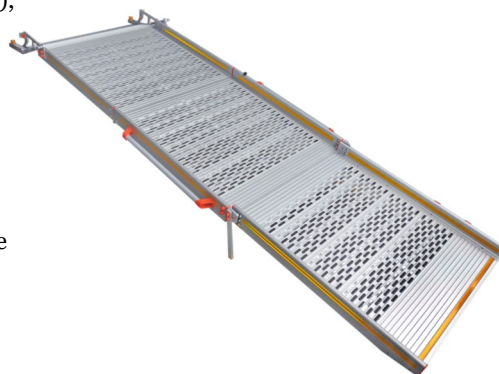


### High quality:

- The parts are machined by CNC, no laser cutting or punching involved, providing a maximum quality finish.
- The pivot points are made out of a stainless steel axle and a self-oil socket with H7 tolerance.
- Vibration and rattling are eliminated by the installation of anti-vibration shock absorbers.
- The aluminum extrusion assembly, forming the floor, are clipped without welding.

« Standard » version:



« Light » version :

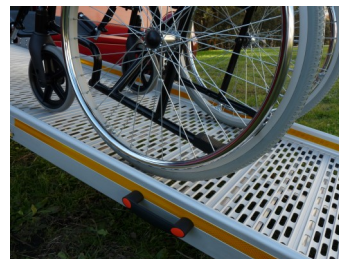

Invisible interface under the carpet



Quick to detach:



### Easy to use:

- Ramp available in 2 or 3 foldable sections, standard or light.
- The ramps are provided with two gas springs which evenly distribute the efforts and facilitate its opening and closing.
- The two section ramp is provided with wheels which facilitate folding and unfolding.
- Installation brackets are available to allow a fixed installation, a quick release or an internal pivoting fixture

3 sections ramp :



2 sections ramp :



Internal rotation of the ramp



Address : BP19, 80490 Hallencourt, France

Tel. : +33 (0)3 22 25 58 65 / Mobile : + 33 (0)6 45 72 46 90

[contact@access-ability.eu](mailto:contact@access-ability.eu)

[www.access-ability.eu](http://www.access-ability.eu)


## TECHNICAL INFORMATION

	Reference	Dimensions (cm)				Weight (Kg)		Max load (Kg)
		Width	Length	Thickness folded	Height folded	Standard model	Light model	
<b>2 sections**</b>	2H 660-2400 (L*)	660	2400	182	1220	32	29	400
	2H 820-2000 (L*)	820	2000		1045	34	29	400
	2H 820-2200 (L*)		2200		1135	37	31	400
	2H 820-2400 (L*)		2400		1220	40	33	400
<b>3 sections**</b>	3H 820-2300 (L*)	820	2300	215	870	40	34	400
	3H 820-2800 (L*)		2800		1045	47	40	400

\* For the option: perforated and lightened ramps "Light", the letter L is added to the reference

\*\* Opening / closing cinematics: 2 sections ramp (A) et 3 sections ramp (B)



**Warranty : 2 years**

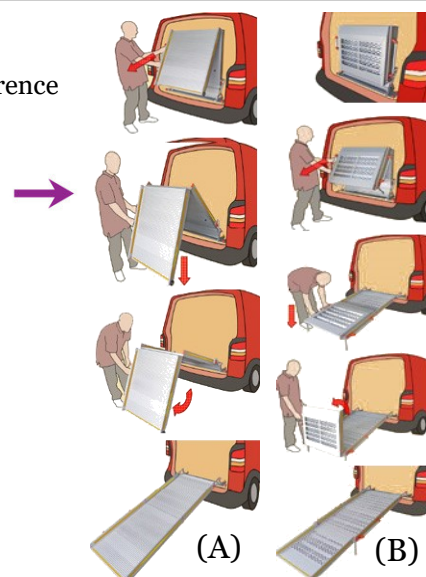



### Fixing brackets :

Quick release system:

Fixed fitting:

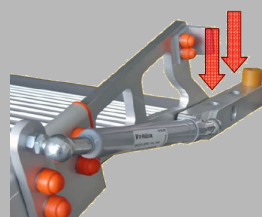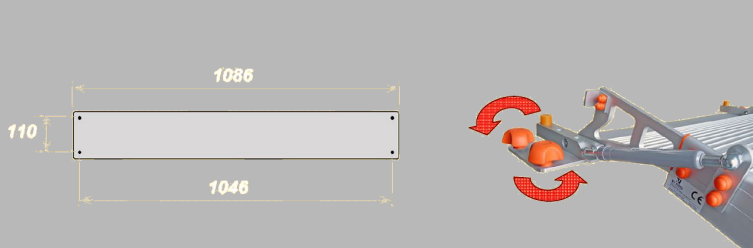

Internal rotational system:

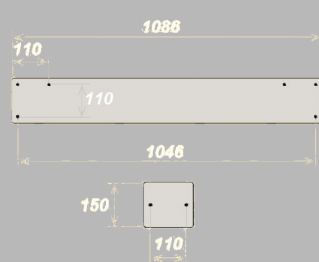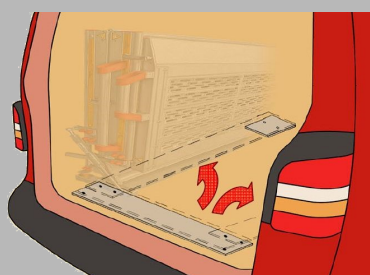

**Please do contact us if you require further information about AX-S Ramp or other ramps.**



**Address : BP19, 80490 Hallencourt, France**

**Tel. : +33 (0)3 22 25 58 65 / Mobile : + 33 (0)6 45 72 46 90**

**contact@access-ability.eu**

**www.access-ability.eu**